

# > CGA

## CONDENSING UNITS FOR OUTDOOR INSTALLATION



**ADAPTIVE  
FUNCTION**



### Available range

#### Unit type

- SR Condensing unit
- SP Heat pump condensing unit  
(reversible on the refrigerant side)

#### Version

- VB Base version
- VD Desuperheater version
- VR Total recovery version

#### Acoustic setting up

- AB Base setting up
- AS Low noise setting up
- AX eXtra low noise setting up

#### Source temperature level

- M Medium temperature level
- A High temperature level

### Unit description

This series of condensing units satisfies the cooling and heating requirements of residential plants of medium size.

All the units are suitable for outdoor installation and can be connected to a remote heat exchanger properly designed in order to transfer to the plant all the cooling (and heating for reversible units) power generated.

The refrigerant circuit, contained in a compartment protected from the air flow to simplify the maintenance operations, is equipped with scroll compressors mounted on damper supports, thermostatic expansion valve (only for SP), reverse cycle valve, axial fans with safety protec-

tion grilles, finned coil made of copper pipes and aluminium louvered fins with subcooling section. The circuit is protected by a safety gas valve, high and low pressure switches.

All the units can be equipped with variable speed fans control that allows the units to operate with low outdoor temperatures in cooling and high outdoor temperature in heating and permits to reduce noise emissions in such operating conditions.

The low noise acoustic setting up (AS) is obtained, starting from the base setting up (AB), reducing the rotational speed of the fans and mounting sound jackets on the compressors and the technical compartment is clad with soundproofing material of suitable thickness.

The eXtra low noise acoustic setting up (AX) is obtained, starting from the low noise setting up (AS), further reducing the rotational speed of the fans and using finned coil with bigger surface.

All the units are supplied with a management and control electrical panel containing general switch, phase presence and correct sequence controller, microprocessor controller with display and all the other electrical components with IP54 minimum protection degree.

All the units are accurately built and individually tested in the factory.

All the units are supplied with refrigerant charge inside.

Only electric and refrigerant connections (between condensing unit and remote heat exchanger) are required for installation.

### Options

#### Compressor starting

- standard (contactors)
- soft starter

#### Fans control

- on-off control
- modulating control (condensation / evaporation control)

#### Compressor power factor correction

#### Electrical load protection

- fuses
- thermal magnetic circuit breakers

#### Coil condensate tray

### Accessories

Rubber vibration dampers

Spring vibration dampers

Coil protection grilles

Remote control

Modbus serial interface on RS485

Programmer clock

Phase sequence and voltage controller

Low temperature kit (standard for SP)

High and low pressure gauges

High temperature thermostat

Coil shut off valves

Outdoor air sensor

Remote plate heat exchanger

Liquid line

NOMINAL performances															
SR	Base setting up (AB)		40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35E5	Cooling capacity		48,9	57,8	63,3	74,3	85,0	98,3	110	121	136	154	171	194	216
	Power input		15,5	18,4	20,5	23,7	27,6	32,1	35,5	39,4	44,5	50,8	56,3	63,7	70,6
	EER		3,15	3,14	3,09	3,14	3,08	3,06	3,10	3,07	3,06	3,03	3,04	3,05	3,06
SR	Low noise setting up (AS)		40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35E5	Cooling capacity		47,4	56,1	61,3	72,0	82,4	95,3	106	118	132	150	165	189	210
	Power input		16,1	19,2	21,3	24,6	28,8	33,4	36,9	41,0	46,3	52,8	58,6	66,2	73,4
	EER		2,94	2,92	2,88	2,93	2,86	2,85	2,87	2,88	2,85	2,84	2,82	2,85	2,86
SR	eXtra low noise setting up (AX)		40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35E5	Cooling capacity		46,3	54,8	59,9	70,4	80,5	93,1	104	114	129	146	162	184	204
	Power input		16,2	19,6	21,9	25,1	29,6	32,5	38,0	42,2	47,7	53,8	59,8	68,1	75,5
	EER		2,86	2,80	2,74	2,80	2,72	2,86	2,74	2,70	2,70	2,71	2,71	2,70	2,70
SP	Base setting up (AB)		40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35E5 A7C50	Cooling capacity		47,3	57,1	62,1	72,6	80,0	96,3	107	119	132	149	166	192	214
	Power input		15,3	18,6	20,4	23,8	26,7	31,9	35,3	39,3	43,9	49,7	55,6	62,7	70,3
	EER		3,09	3,07	3,04	3,05	3,00	3,02	3,03	3,03	3,01	3,00	2,99	3,06	3,04
A7C45 A7C50	Heating capacity		47,8	57,5	62,6	73,8	82,3	98,7	109	124	135	153	171	195	214
	Power input		15,3	18,5	20,3	23,7	26,9	32,6	35,0	40,0	43,7	50,5	55,4	63,4	69,8
	COP		3,12	3,11	3,08	3,11	3,06	3,03	3,11	3,10	3,09	3,03	3,09	3,08	3,07
A7C45 A7C50	Heating capacity		52,6	63,3	68,9	81,2	90,5	109	120	136	149	168	188	215	235
	Power input		13,5	16,3	17,9	20,9	23,7	28,7	30,8	35,2	38,5	44,4	48,8	55,8	61,4
	COP		3,90	3,88	3,85	3,89	3,82	3,80	3,90	3,86	3,87	3,78	3,85	3,85	3,83
SP	Low noise setting up (AS)		40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35E5 A7C50	Cooling capacity		45,4	54,9	59,6	69,7	76,8	92,4	103	114	126	143	160	185	205
	Power input		15,9	19,8	21,6	25,2	28,3	33,8	37,4	41,6	46,6	52,7	59,0	66,4	74,5
	EER		2,86	2,77	2,76	2,77	2,71	2,73	2,75	2,74	2,70	2,71	2,71	2,79	2,75
A7C45 A7C50	Heating capacity		46,6	56,0	61,1	71,9	80,2	96,2	106	121	132	149	167	190	209
	Power input		14,6	17,7	19,4	22,6	25,7	31,1	33,4	38,2	41,7	48,2	52,9	60,5	66,7
	COP		3,19	3,16	3,15	3,18	3,12	3,09	3,17	3,17	3,17	3,09	3,16	3,14	3,13
A7C45 A7C50	Heating capacity		51,3	61,6	67,2	79,1	88,2	106	117	133	145	164	184	209	230
	Power input		12,8	15,6	17,1	19,9	22,6	27,4	29,4	33,6	36,7	42,4	46,6	53,2	58,7
	COP		4,01	3,95	3,93	3,97	3,90	3,87	3,98	3,96	3,95	3,87	3,95	3,93	3,92
SP	eXtra low noise setting up (AX)		40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35E5 A7C50	Cooling capacity		44,5	53,7	58,4	68,3	75,3	90,5	101	111	124	140	157	180	201
	Power input		17,0	20,9	22,8	26,6	29,9	35,7	39,5	44,0	49,2	55,6	62,3	70,3	78,7
	EER		2,62	2,57	2,56	2,57	2,52	2,54	2,56	2,52	2,52	2,52	2,52	2,56	2,55
A7C45 A7C50	Heating capacity		44,9	54,0	58,9	69,4	77,4	92,8	103	117	127	144	161	183	201
	Power input		13,9	16,8	18,5	21,6	24,5	29,7	31,9	36,4	39,8	46,0	50,4	57,7	63,5
	COP		3,23	3,21	3,18	3,21	3,16	3,12	3,23	3,21	3,19	3,13	3,19	3,17	3,17
A7C45 A7C50	Heating capacity		49,4	59,4	64,8	76,3	85,1	102	113	129	140	158	177	201	221
	Power input		12,2	14,8	16,3	19,0	21,6	26,1	28,1	32,0	35,0	40,5	44,4	50,8	55,9
	COP		4,05	4,01	3,98	4,02	3,94	3,91	4,02	4,03	4,00	3,90	3,99	3,96	3,95

The values are referred to units without options and accessories.

**EER** (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

**COP** (Coefficient Of Performance) = ratio of the total heating capacity to the effective power input of the unit

**A35E5** = source : air in 35°C d.b. / plant : evaporation temperature (dew point) 5°C

- superheating 5°C

**A7C50** = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 50°C - subcooling 5°C

**A7C45** = source : air in 7°C d.b. 6°C w.b. / plant : condensation temperature (dew point) 45°C - subcooling 5°C

**Acoustic performances**

<b>Base setting up (AB)</b>	<b>40.2</b>	<b>50.2</b>	<b>60.2</b>	<b>70.2</b>	<b>80.2</b>	<b>90.2</b>	<b>100.2</b>	<b>115.2</b>	<b>130.2</b>	<b>145.2</b>	<b>160.2</b>	<b>180.2</b>	<b>200.2</b>	
Sound power level	82	82	83	84	84	85	85	85	86	87	87	88	88	dB(A)
Sound pressure level at 1 meter	64	64	65	66	66	67	67	67	68	69	69	69	69	dB(A)
Sound pressure level at 5 meters	55	55	56	57	57	58	58	58	59	60	60	61	61	dB(A)
Sound pressure level at 10 meters	50	50	51	52	52	53	53	53	54	55	55	56	56	dB(A)
<b>Low noise setting up (AS)</b>	<b>40.2</b>	<b>50.2</b>	<b>60.2</b>	<b>70.2</b>	<b>80.2</b>	<b>90.2</b>	<b>100.2</b>	<b>115.2</b>	<b>130.2</b>	<b>145.2</b>	<b>160.2</b>	<b>180.2</b>	<b>200.2</b>	
Sound power level	79	79	80	81	81	82	82	82	83	84	84	85	85	dB(A)
Sound pressure level at 1 meter	61	61	62	63	63	64	64	64	65	66	66	66	66	dB(A)
Sound pressure level at 5 meters	52	52	53	54	54	55	55	55	56	57	57	58	58	dB(A)
Sound pressure level at 10 meters	47	47	48	49	49	50	50	50	51	52	52	53	53	dB(A)
<b>eXtra low noise setting up (AX)</b>	<b>40.2</b>	<b>50.2</b>	<b>60.2</b>	<b>70.2</b>	<b>80.2</b>	<b>90.2</b>	<b>100.2</b>	<b>115.2</b>	<b>130.2</b>	<b>145.2</b>	<b>160.2</b>	<b>180.2</b>	<b>200.2</b>	
Sound power level	77	77	78	79	79	80	80	80	81	82	82	83	83	dB(A)
Sound pressure level at 1 meter	59	59	60	61	61	62	62	62	63	64	64	64	64	dB(A)
Sound pressure level at 5 meters	50	50	51	52	52	53	53	53	54	55	55	56	56	dB(A)
Sound pressure level at 10 meters	45	45	46	47	47	48	48	48	49	50	50	51	51	dB(A)

The values are referred to units without options and accessories.

The acoustic performances are referred to units operating in cooling mode at nominal conditions A35E5.

Unit placed in free field on reflecting surface (directional factor equal to 2).

The sound power level is measured according to ISO 9614 standard.

The sound pressure level is calculated according to ISO 3744 and is referred to a distance of 1/5/10 metres from the external surface of the unit.

**Technical data**

<b>Unit</b>	<b>40.2</b>	<b>50.2</b>	<b>60.2</b>	<b>70.2</b>	<b>80.2</b>	<b>90.2</b>	<b>100.2</b>	<b>115.2</b>	<b>130.2</b>	<b>145.2</b>	<b>160.2</b>	<b>180.2</b>	<b>200.2</b>	
Power supply	400 - 3+N - 50								400 - 3 - 50					V-ph-Hz
Compressor type						scroll								-
N° compressors / N° refrigerant circuits					2 / 1									n°
Source side heat exchanger type						finned coil								-
Fans type						axial								-
N° fans	2		3			2			3		4			n°
Liquid line connection	7/8"					1 1/8"					1 3/8"			-
Gas line connection	1 5/8"					2 1/8"								-

**Electrical data**

<b>Standard unit</b>	<b>40.2</b>	<b>50.2</b>	<b>60.2</b>	<b>70.2</b>	<b>80.2</b>	<b>90.2</b>	<b>100.2</b>	<b>115.2</b>	<b>130.2</b>	<b>145.2</b>	<b>160.2</b>	<b>180.2</b>	<b>200.2</b>	
<b>FLA</b> - Full load current at maximum tolerated conditions	40,2	45,7	53,3	58,7	69,6	75,5	90,0	97,9	106	123	136	159	170	A
<b>FLI</b> - Full load power input at maximum tolerated conditions	21,6	24,4	28,4	31,0	36,2	44,0	55,0	60,5	66,0	75,7	83,3	95,4	103	kW
<b>MIC</b> - Maximum instantaneous current of the unit	134	143	149	173	213	264	259	267	267	348	361	355	391	A
<b>MIC SS</b> - Maximum instantaneous current of the unit with soft starter options	89,3	96,3	101	117	143	174	175	183	183	200	246	248	272	A

**Operative range**

<b>Temperature</b>	<b>Unit type</b>	<b>Cooling</b>		<b>Heating</b>		
		<b>min</b>	<b>max</b>	<b>min</b>	<b>max</b>	
Outdoor air inlet temperature	SR, SP	-10*	48	-10	40*	°C
Evaporating temperature (dew point)	SR, SP	1	20	-	-	°C
Condensing temperature (dew point)	SP	-	-	35	60	°C
Water outlet temperature (VD)	SR, SP	30	70	30	70	(°C)
Water outlet temperature (VR)	SR	30	55	-	-	(°C)

\* with fans modulating control option (condensation / evaporation control)

## VD and VR versions

These units allow to recover the heating power, otherwise wasted on air, through an additional heat exchanger.

The **Desuperheater Version (VD)** allow the hot water production at temperatures between 30 and 70°C through the partial heat recovery of the condensation heat.

The **Total Recovery Version (VR)** allows the cold water production and, at the same time, the hot water production at temperatures between 30 and 55°C through the total recovery of the condensation heat.

Desupeheater Version (VD) - NOMINAL performances														
SR	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
A35E5 - W45	Cooling capacity	50,9	60,1	65,8	77,3	88,4	102	115	126	142	161	177	202	225
	Total power input	15,1	17,9	19,8	23,0	26,8	31,1	34,4	38,2	43,1	49,3	54,7	61,8	68,4
	EER	3,37	3,36	3,32	3,36	3,30	3,28	3,34	3,30	3,29	3,27	3,24	3,27	3,29
	Heating recovery capacity	14,8	17,4	19,1	22,4	25,6	29,6	33,2	36,5	41,0	46,6	51,5	58,6	65,1
	Water flow rate recovery	0,70	0,83	0,91	1,07	1,22	1,42	1,59	1,74	1,96	2,23	2,46	2,80	3,11
	Water pressure drop recovery	7	11	13	17	22	18	22	12	16	20	24	20	24
A35E5 - W45	Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2
	Cooling capacity	49,2	59,4	64,6	75,5	83,2	100	111	124	137	155	173	200	222
	Total power input	14,9	18,1	19,8	23,1	25,9	30,9	34,2	38,1	42,6	48,2	54,0	60,8	68,1
	EER	3,30	3,28	3,26	3,27	3,21	3,24	3,25	3,25	3,22	3,22	3,20	3,29	3,26
	Heating recovery capacity	14,3	17,2	18,7	21,9	24,1	29,1	32,2	35,8	39,7	45,0	50,2	58,0	64,5
	Water flow rate recovery	0,68	0,82	0,89	1,05	1,15	1,39	1,54	1,71	1,90	2,15	2,40	2,77	3,08
A35E5 - W45	Water pressure drop recovery	7	11	12	17	20	17	20	12	15	19	23	20	23
Total Recovery Version (VR) - NOMINAL performances														
Base setting up (AB)	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
Cooling capacity	50,9	60,1	65,8	77,3	88,4	102	115	126	142	161	177	202	225	
Total power input	14,9	17,7	19,6	22,7	26,5	30,8	34,1	37,8	42,7	48,8	54,1	61,2	67,7	
EER	3,42	3,40	3,36	3,41	3,34	3,31	3,37	3,33	3,33	3,30	3,27	3,30	3,32	
A35E5 - W45	Heating recovery capacity	65,0	76,9	84,5	98,9	114	131	147	162	182	207	229	260	289
	Water flow rate recovery	3,11	3,67	4,04	4,73	5,43	6,28	7,02	7,73	8,70	9,89	10,9	12,4	13,8
	Water pressure drop recovery	41	57	48	53	59	58	62	56	61	61	62	65	65

Data declared according to EN 14511. The values are referred to units without options and accessories.

**EER** (Energy Efficiency Ratio) = ratio of the total cooling capacity to the effective power input of the unit

**HRE** (Heat Recovery Efficiency) = ratio of the total capacity of the system (heating plus cooling capacity) to the effective power input

A35W7 - W45 = source : air in 35°C d.b. / plant : water in 12°C out 7°C / Recovery : water in 40°C out 45°C


## CONTROL SYSTEM

The units are equipped with a controller designed to ensure energy saving and unit efficiency. Available functions :

- Adaptive function
- Dynamic defrost
- Sound management
- Climatic control in heating and in cooling mode
- Economy function
- Demand limit
- Integrative heating
- Remote stand by
- Remote cooling-heating



## DIMENSIONS - MINIMUM OPERATING AREA - WEIGHT

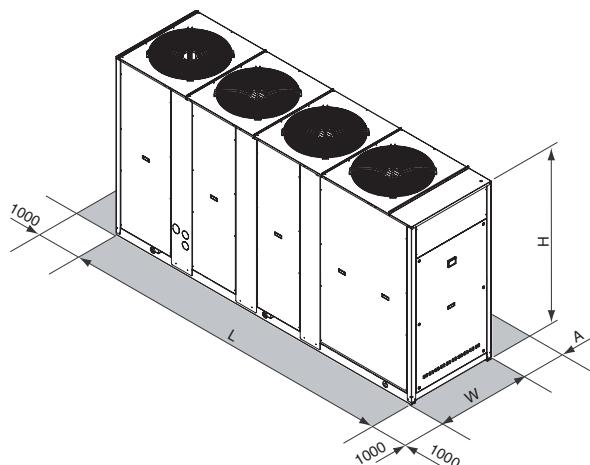

	40.2	50.2	60.2	70.2	80.2	90.2	100.2	115.2	130.2	145.2	160.2	180.2	200.2	
L				2501				3343				4097		mm
W				954			1104			1104		1104		mm
H				1930			1793			2193		2193		mm
A				1600						2000				mm
Operating maximum weight	635	639	639	680	705	953	1034	1065	1181	1240	1292	1435	1481	kg